


螺帽公稱型號	螺桿軸 外徑 d	導程 l	滾珠 直徑 D_w	滾珠間矩 圓直徑 d_m	螺桿軸螺 紋溝底徑 d_i	有效圈數 圈數 × 列數	基本額定負載 (N)		軸向 最大 間隙	螺帽尺寸 外徑 D
							動態額定值 C_a	靜態額定值 C_{sa}		
RNFCL 1212A3	12	12	2.381	12.65	10.1	1.7×2	3740	6640	0.10	26
RNFCL 1212A6						1.7×4	6780	13300		
*RNFCL 1520A3	15	20	3.175	15.5	12.2	1.7×2	6730	12300	0.10	33
RNFCL 1520A3S										
*RNFCL 1616A3	16	16	2.778	16.65	13.5	1.7×2	5430	10400	0.10	32
RNFCL 1616A3S										
*RNFCL 1616A6						1.7×4	9860	20800		
RNFCL 1616A6S										
*RNFCL 2020A3	20	20	3.175	20.75	17.3	1.7×2	7810	16500	0.10	39
RNFCL 2020A3S										
*RNFCL 2020A6						1.7×4	14200	33000		
RNFCL 2020A6S										
*RNFCL 2525A3	25	25	3.969	26	22.0	1.7×2	11700	25800	0.12	47
RNFCL 2525A3S										
*RNFCL 2525A6						1.7×4	21200	51500		
RNFCL 2525A6S										
*RNFCL 3232A3	32	32	4.762	33.25	28.0	1.7×2	17100	40500	0.15	58
RNFCL 3232A3S										
*RNFCL 3232A6						1.7×4	31000	81000		
RNFCL 3232A6S										
*RNFCL 4040A3	40	40	6.35	41.75	35.0	1.7×2	27200	67900	0.20	73
RNFCL 4040A3S										
*RNFCL 4040A6						1.7×4	49300	136000		
RNFCL 4040A6S										
*RNFCL 5050A3	50	50	7.938	52.25	44.0	1.7×2	40600	106000	0.25	90
RNFCL 5050A3S										
*RNFCL 5050A6						1.7×4	73700	212000		
RNFCL 5050A6S										

備註：1. 螺桿軸全長有時會較加工上用之 L_s 尺寸稍微長一些。
 2. 交貨時，將分開提供裝配在假軸上之螺帽組裝品和螺桿軸。
 3. 螺桿軸公稱型號上之**，係標示標準螺桿軸長度除以100mm後所得出之值。

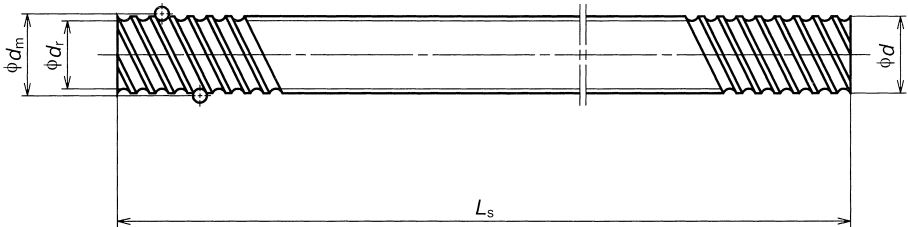

單位：mm

螺帽尺寸										螺帽重量 (kg)	假軸		螺桿軸			軸之公稱型號	軸 (每米長) 重量 (kg)
法蘭部			全長			安裝孔		注油孔			外徑	內徑	標準螺桿軸長度				
A	H	B	E	L _n	M	W	X	Q	T	d _o	d _i	L _s					
44	28	6	9	30	—	35	4.5	M3×0.5	3.0	0.12	10.1	8.1	400	800	RS1212A **	0.74	
51	35	10	11	45	— 3	42	4.5	M6×1	5.0	0.28	12.2	10.2	500	1000	1500	RS1520A **	1.15
53	34	10	10	38	— 3 3	42	4.5	M6×1	5.0	0.23	13.5	11.5	500	1000	1500	RS1616A **	1.37
62	41	10	11.5	46	— 3 3	50	5.5	M6×1	5.0	0.37	17.3	14.9	500	1000	2000	RS2020A **	2.19
74	49	12	13	55	— 3 3	60	6.6	M6×1	6.0	0.62	22.0	19.6	1000	2000	2500	RS2525A **	3.43
92	60	12	16	70	— 3 3	74	9	M6×1	5.5	1.10	28.0	25.6	1000	2000	3000	RS3232A **	5.71
114	75	15	19.5	85	— 3.5 3.5	93	11	M6×1	6.5	2.09	35.0	31.8	2000	3000	4000	RS4040A **	8.82
135	92	20	21.5	107	— 3.5 3.5	112	14	M6×1	7.0	3.90	44.0	40.8	2000	3000	4000	RS5050A **	13.81

備註：4. 庫存品沒有進行表面加工。根據客戶要求，可用磷酸鹽護膜等進行表面加工。

5. 帶有密封墊時，螺帽全長將長出2×M尺寸。密封墊為薄密封墊。

6. “*” 號為訂購生產品